

RUNNER BROCHURE



DELTALIGHT

cebeo
A Sonepar Company



06
INDOOR CEILING




31
INDOOR WALL



53
MAINS VOLTAGE
TRACK SYSTEMS



71
OUTDOOR WALL
AND FLOOR

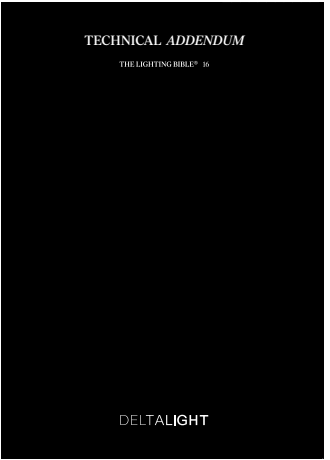

Addendum
TECHNICAL

CEBEO,
YOUR PARTNER IN LIGHTING

With an extensive stock in over 50 branches and in our distribution center, Cebeo has a tailor-made solution for every application and every budget. Across Belgium, around 60 lighting specialists are ready to support you in residential, commercial, and industrial projects.

Visit one of our 54 branches or visit our lighting webpage for more information:




Contact details by region:
 East- & West-Flanders | verlichting.regio1@cebeo.be
 Antwerp & Limburg | BE_CEB_R2_VERLICHTING@cebeo.be
 Brabant | Eclairage.brabant@cebeo.be
 Wallonia | Eclairage.wallonie@cebeo.be

INDOOR LIGHTING

CEILING

CEILING *RECESSED*

CEILING *SURFACE*

<i>FUNCTION</i>	FORM <i>ROUND</i>	FORM <i>SQUARE / LINEAR</i>	FORM <i>ROUND</i>	FORM <i>SQUARE / LINEAR</i>
<i>ACCENT LIGHT</i>	PARTOU PAGE 10  SPYCO PAGE 24 	PARTOU PAGE 10 	GOBY PAGE 20  SPYCO PAGE 24 	GOBY PAGE 20 
<i>GENERAL LIGHT</i>	DIRO SBL PAGE 16 		DIRO SBL PAGE 16 	

PARTOU FAMILY

A perfect fit whatever the location, Partou is a luminaire that lives up to its French name. Whether it is for the home, the office or public spaces, for a bedroom, dining room or a bathroom, Partou is a true lighting all-rounder, and can be used everywhere. It provides IP44 protection from below, and has numerous applications. It can be used as either spot or effect lighting and in a combination of round and square shapes, both as fixed and adjustable luminaires.



PARTOU OK
FINISH B BLACK

Find out more about
our PARTOU Family



deltalight.com/partou

WITHIN THE FAMILY

Here is an overview of the family's key characteristics.
Check the installation icons to see if products are available for wall, floor, outdoor, or other applications.
*Note: Characteristics shown are specific to indoor or outdoor use—never both.
For families with both options, see the corresponding section for details.*

FINISHES
Finishes Library on page 52



B BLACK



FBR FLEMISH BRONZE



FG FLEMISH GOLD



W WHITE

INSTALLATION




WITH TRIM



CEILING
RECESSED



IP RATED



LOW RECESSED DEPTH

PERFORMANCE



CCT 2700K



CCT 3000K



MEDIUM
FLOOD



FLOOD

FORM & FUNCTION




ROUND



SQUARE

WITHIN THIS CHAPTER

This section presents different product types within the family specifically designed for indoor ceiling applications, along with their main features.



MINI PARTOU

FORM ROUND

INSTALLATION RECESSED WITH TRIM


LED UP TO 8,6W - 1020lm

OPTICS 25° / 37°

CCT 2700K / 3000K

ADJUSTABILITY FIX

IP44



PARTOU

FORM ROUND / SQUARE

INSTALLATION RECESSED WITH TRIM

LED UP TO 8,6W - 1020lm

OPTICS 25° / 37°

CCT 2700K / 3000K

ADJUSTABILITY FIX / ADJUSTABLE

IP20 / 44

PARTOU



PARTOU				FLAT	FLAT OK
3000K CRI>90	LED [U] 5.8W / 787lm / 350mA	IP20	36°	25219 9320 ◇	25220 9320 ◇
2700K CRI>90	LED [U] 5.8W / 753lm / 350mA			25219 9220 ◇	25220 9220 ◇

◇ B ● / FBR ● / FG ● / W ○



PARTOU				HI	AC
3000K CRI>90	LED 8W / 630lm	33°	MAINS DIM		25217 9328 ◇
2700K CRI>90	LED 8W / 597lm				25217 9228 ◇

QPAR51 max.20W


◇ B ● / FBR ● / FG ● / W ○

100-240V / 50-60Hz

◇ IP20


230V / 50-60Hz

◇ IP20

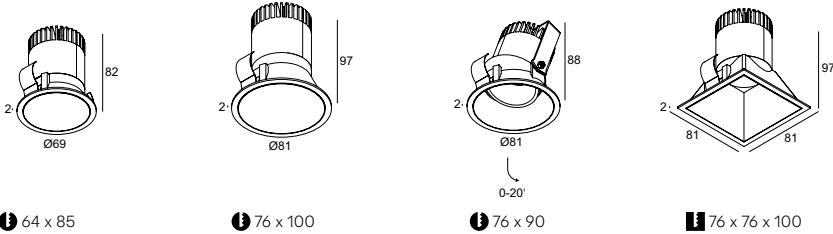

PARTOU				MINI IP	IP	OK	S IP
3000K CRI>90	LED [Q] 5.8W / 734lm / 350mA LED [Q] 8.6W / 1018lm / 500mA	IP20	25°			25214 9320 ◇	
			37°			25214 9330 ◇	
		IP44	25°	25211 9320 ◇	25213 9320 ◇		25216 9320 ◇
			37°	25211 9330 ◇	25213 9330 ◇		25216 9330 ◇
2700K CRI>90	LED [Q] 5.8W / 702lm / 350mA LED [Q] 8.6W / 974lm / 500mA	IP20	25°			25214 9220 ◇	
			37°			25214 9230 ◇	
		IP44	25°	25211 9220 ◇	25213 9220 ◇		25216 9220 ◇
			37°	25211 9230 ◇	25213 9230 ◇		25216 9230 ◇

◇ B-B ●● / FBR-FBR ●● / FG-FG ●● / W-W ○○




PARTOU MINI IP




PARTOU IP



PARTOU OK



PARTOU FLAT OK



PARTOU S IP

REFERENCE COMPOSITION

← FIXTURES

1 I CHOOSE MY FIXTURE + COLOUR ◇

↓ ADDITIONS

- 2 I MUST ADD THIS REQUIREMENT (R)
- 3 I WANT TO ADD THIS OPTION (O)
- 4 I WANT TO ADD THIS ACCESSORY (A)

				REQUIREMENT / OPTION / ACCESSORY			
				MINI PARTOU	PARTOU		
				IP	IP	OK	S IP
LED POWER SUPPLY MORE INFO ON FOLD-OUT							
MAINS DIM (FE) 11		21012 0298	 min. 55	R	R	R	R
1-10V DIM 15		300 90 124	 min. 55	R	R	R	R
DALI DIM 14		300 90 125	 min. 55	R	R	R	R
INSTALLATION MORE INFO ON PAGE T25-31							
PLASTERKIT		202 11 19	 80 x 180		O	O	



ARCHITECT STEIN VAN ROSSEM

PARTOU IP



VERFAILLIE INTERIEUR

PARTOU OK

DIRO SBL FAMILY

Diro SBL is a family of recessed and surface-mounted luminaires that have been designed to ensure maximum versatility. Visual comfort is also paramount thanks to the multi-layered optic with prismatic plexi finish at the front. Easy to install, anywhere, anytime, thanks to its reduced height and the inclusion of a mains driver, Diro SBL is available in both IP20 and IP44 ratings.



DIRO SBL ON S

FINISH W WHITE

DIRO SBL L

FINISH W WHITE

DIRO SBL ON L

FINISH W WHITE

Find out more about
our DIRO SBL Family




deltalight.com/dirosbl


REFERENCE COMPOSITION

↓ FIXTURES


1 | CHOOSE MY FIXTURE + COLOUR ◇



121 x 65 / max.25




156 x 70 / max.25




208 x 70 / max.25

DIRO SBL			S IP	M	L
3000K CRI>90	LED 5,9W / 950lm / 350mA	IP44	11436 9300 ◇		
	LED 9,8W / 1620lm / 350mA	IP20		202 296 93 ◇	
	LED 18,1W / 2288lm / 1050mA				11437 9300 ◇
2700K CRI>90	LED 5,9W / 900lm / 350mA	IP44	11436 9200 ◇		
	LED 9,8W / 1500lm / 350mA	IP20		202 296 92 ◇	
	LED 18,1W / 2281lm / 1050mA				11437 9200 ◇


◇ B ● / W ○
100-240V / 50-60Hz



Ø110



Ø115



Ø218

DIRO SBL			ON S	ON S IP	ON L
3000K CRI>90	LED 5,9W / 950lm / 350mA	IP20	251 77 93 ◇		
	LED 5,9W / 950lm / 350mA	IP44		11435 9300 ◇	
	LED 17,5W / 2625lm / 1050mA	IP20			251 81 93 ◇
2700K CRI>90	LED 5,9W / 900lm / 350mA	IP20	251 77 92 ◇		
	LED 5,9W / 900lm / 350mA	IP44		11435 9200 ◇	
	LED 17,5W / 2625lm / 1050mA	IP20			251 81 92 ◇

◇ B ● / W ○
100-240V / 50-60Hz





QOBY FAMILY

Qoby is a family of surface-mounted luminaires, available in round or square designs. Its LED engine is recessed deeper into the luminaire, reducing the cut-off angle to improve visual comfort and minimise glare. Available in IP20 and IP44, it can also be further customised with 'tubes' in black, white and Flemish gold finishes.



QOBY S AC
FINISH W WHITE
+ ACCESSORY QOBY TUBE
FINISH B


Find out more about
our QOBY Family



deltalight.com/qoby

WITHIN THE FAMILY

Here is an overview of the family's key characteristics.
Check the installation icons to see if products are available for wall, floor, outdoor, or other applications.
Note: Characteristics shown are specific to indoor or outdoor use—never both.
For families with both options, see the corresponding section for details.

FINISHES	INSTALLATION	PERFORMANCE	FORM & FUNCTION
 B BLACK	 CEILING SURFACE	 CCT 2700K CCT 3000K	 ROUND
 W WHITE		 FLOOD	 SQUARE

WITHIN THIS CHAPTER

This section presents different product types within the family specifically designed for indoor ceiling applications, along with their main features.



QOBY



FORM ROUND
LED UP TO 17,4W - 2360lm
RETROFIT GU10
OPTICS 33°
CCT 2700K / 3000K
ADJUSTABILITY FIX
IP20 / 44



QOBY S

FORM SQUARE
LED UP TO 17,4W - 2360lm
RETROFIT GU10
OPTICS 33°
CCT 2700K / 3000K
ADJUSTABILITY FIX
IP20 / 44

QOBY

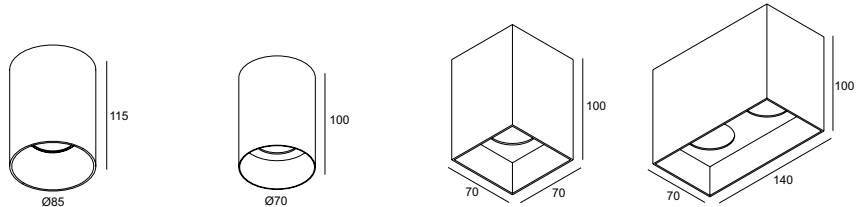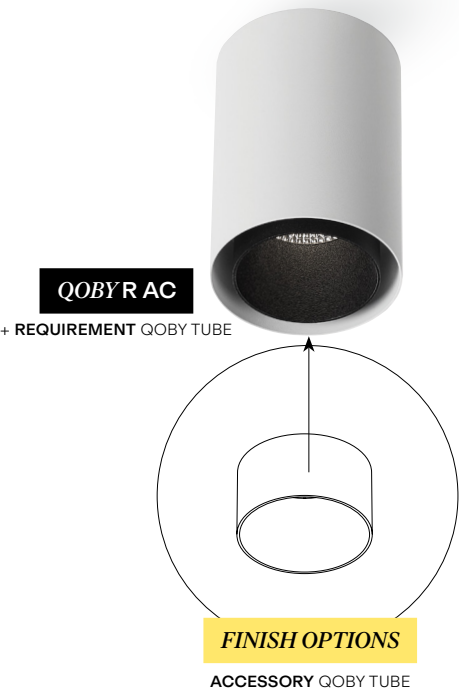

QOBY				R HI	R AC DIM8	S AC 1 DIM8	S AC 2 DIM8
3000K CRI>90	LED 8W / 630lm	33°	MAINS DIM		28311 9328 ◇	28312 9328 ◇	
	2x LED 8W / 630lm					28313 9328 ◇	
2700K CRI>90	LED 8W / 597lm				28311 9228 ◇	28312 9228 ◇	
	2x LED 8W / 597lm						28313 9228 ◇
🔊 QPAR51 max.20W				19121 0000 ◇			
				◇ B ● / W ○			
				100-240V / 50-60Hz		230V / 50-60Hz	
				◇ IP20		◇ IP20	

REFERENCE COMPOSITION

↑ FIXTURES

1 I CHOOSE MY **FIXTURE** + **COLOUR** ◇

↓ ADDITIONS

- 2 I MUST ADD THIS **REQUIREMENT** (R)
 3 I WANT TO ADD THIS **OPTION** (O)
 4 I WANT TO ADD THIS **ACCESSORY** (A)

REQUIREMENT / OPTION / ACCESSORY					
QOBY					
	R HI	R AC DIM8	S AC 1 DIM8	S AC 2 DIM8	
FINISH MORE INFO ON PAGE T28					
QOBY TUBE	28310 0010 B / W / FG		A	A	A



QOBY S AC 2

SPYCO FAMILY

Spyco is a family of versatile spot luminaires that can be adapted to suit diverse lighting setups, with options for precise and customisable illumination. Advanced lenses ensure accurate light distribution, and optional dimming and honeycomb filter features guarantee optimum visual comfort. Spyco provides a tailored lighting solution that is both sophisticated and stylish, whatever the project.



SPYCO ON AC
FINISH W WHITE

Find out more about
our SPYCO Family



deltalight.com/spyco

WITHIN THE FAMILY

Here is an overview of the family's key characteristics.
Check the installation icons to see if products are available for wall, floor, outdoor, or other applications.
Note: Characteristics shown are specific to indoor or outdoor use—never both.
For families with both options, see the corresponding section for details.

FINISHES
Finishes Library on page 52


B BLACK


W WHITE

INSTALLATION


CEILING
RECESSED


CEILING
SURFACE


MAIN
VOLTAGE

PERFORMANCE


SPOT


MEDIUM
FLOOD


FLOOD

CCT 2700K

CCT 3000K

FORM & FUNCTION


ROUND



WITHIN THIS CHAPTER

This section presents different product types within the family specifically designed for indoor ceiling applications, along with their main features.






SPYCO

- FORM** ROUND
- LED** UP TO 8W - 630lm
RETROFIT GU10
- OPTICS** 33°
- CCT** 2700K / 3000K
- ADJUSTABILITY** ADJUSTABLE
- IP20

SPYCO



						
SPYCO				ON 1	ON 2	ON 3
3000K CRI>90	1 x LED [U] 5.8W / 787lm / 350mA	33°	MAINS DIM	414 353 811 932 ED8 ◇		
	2 x LED [U] 5.8W / 787lm / 350mA				414 353 812 932 ED8 ◇	
	3 x LED [U] 5.8W / 787lm / 350mA					414 353 813 932 ED8 ◇
2700K CRI>90	1 x LED [U] 5.8W / 753lm / 350mA			414 353 811 922 ED8 ◇		
	2 x LED [U] 5.8W / 753lm / 350mA				414 353 812 922 ED8 ◇	
	3 x LED [U] 5.8W / 753lm / 350mA					414 353 813 922 ED8 ◇
				◇ B ● / W ○ 220-240V / 50-60Hz □ IP20		

REFERENCE COMPOSITION

← FIXTURES

1 | CHOOSE MY **FIXTURE** + **COLOUR** ◇

↓ ADDITIONS

2 | I MUST ADD THIS **REQUIREMENT** (R)

3 | I WANT TO ADD THIS **OPTION** (O)

4 | I WANT TO ADD THIS **ACCESSORY** (A)

REQUIREMENT / OPTION / ACCESSORY				
SPYCO				
		ON 1	ON 2	ON 3
FINISH	MORE INFO ON PAGE T28			
	SPY TUBE S		414 02 00 B / W / FG	
		1 x R	2 x R	3 x R

SPYCO

AC / Hi

SPYCO				CLIP AC	ON AC	ON 1 AC	ON 2 AC	ON 3 AC
3000K CRI>90	1 x LED 8W / 630lm	33°	MAINS DIM	19918 9328 ◊	19919 9328 ◊	28314 9328 ◊		
	2 x LED 8W / 630lm					28315 9328 ◊		
	3 x LED 8W / 630lm						28316 9328 ◊	
2700K CRI>90	1 x LED 8W / 597lm			19918 9228 ◊	19919 9228 ◊	28314 9228 ◊		
	2 x LED 8W / 597lm					28315 9228 ◊		
	3 x LED 8W / 597lm						28316 9228 ◊	

◊ B ● / W ○ (incl. SPY TUBE S)

230V / 50-60Hz

◊ P20

SPYCO			CLIP HI	ON 1 HI	ON 2 HI	ON 3 HI
1 x QPAR51 max.20W	IP20		414 353 00 ◊	414 353 10 ◊		
2 x QPAR51 max.20W				414 353 20 ◊		
3 x QPAR51 max.20W					414 353 30 ◊	

◊ B ● / W ○

220-240V / 50-60Hz

◻



- REFERENCE COMPOSITION
- ← FIXTURES
- 1 I CHOOSE MY FIXTURE + COLOUR ◊
- ↓ ADDITIONS
- 2 I MUST ADD THIS REQUIREMENT (R)
- 3 I WANT TO ADD THIS OPTION (O)
- 4 I WANT TO ADD THIS ACCESSORY (A)

REQUIREMENT / OPTION / ACCESSORY									
SPYCO AC						SPYCO HI			
CLIP	ON	ON 1	ON 2	ON 3		CLIP	ON 1	ON 2	ON 3
FINISH MORE INFO ON PAGE T28									
SPY TUBE S 414 02 00 B / W						A	A	2 x A	3 x A
LED LAMP MORE INFO ON PAGE T7						O	O	2 x O	3 x O



INDOOR LIGHTING

WALL

WALL

FUNCTION	FORM ROUND	FORM SQUARE / LINEAR
ACCENT LIGHT	ORBIT PAGE 40 	GALA PAGE 36  VISO PAGE 46  WA-T PAGE 50 
GENERAL LIGHT		

GALA FAMILY

Contemporary yet timeless, Gala is a stylish range of wall-mounted luminaires. Distinctive for its rectangular shape with rounded corners, and available as both a downlight and an uplight, Gala bathes spaces in a flood of indirect light to create a warm and intimate environment.



GALA XL
FINISH W WHITE

Find out more about
our GALA Family



deltalight.com/gala

WITHIN THE FAMILY

Here is an overview of the family's key characteristics.
Check the installation icons to see if products are available for wall, floor, outdoor, or other applications.
Note: Characteristics shown are specific to indoor or outdoor use—never both.
For families with both options, see the corresponding section for details.

FINISHES

Finishes Library on page 52



W WHITE

INSTALLATION



WALL
SURFACE

PERFORMANCE

CCT 2700K

CCT 3000K



DOWNLIGHT
UPLIGHT

FORM & FUNCTION



SQUARE

WITHIN THIS CHAPTER

This section presents different product types within the family specifically designed for indoor wall applications, along with their main features.



GALA T

FORM SQUARE

LED UP TO 9,4W - 1480lm

OPTICS DOWN-UPLIGHT

CCT 2700K / 3000K

ADJUSTABILITY FIX

IP20

GALA



GALA				T
3000K CRI>90	LED 9,4W / 1479lm / 350mA	IP20	NON DIM	12220 9300 ◇
2700K CRI>90	LED 9,4W / 1422lm / 350mA		NON DIM	12220 9200 ◇

◇ W 

 220-240V / 50-60Hz



CASTEELKEN

GALA T

ORBIT FAMILY

Wall-mounted Orbit is the perfect way to create dramatic up-and-down light patterns on any interior wall. It comes in a standard black or gold-painted finish, or in a bold, spiky punk look. Orbit T, a see-through luminaire, uses flexible LEDs positioned within its hollow interior to create a stunning up-down light effect.



ORBIT

FINISH B BLACK / FG FLEMISH GOL

Find out more about our ORBIT Family



deltalight.com/orbit

WITHIN THE FAMILY


Here is an overview of the family's key characteristics. Check the installation icons to see if products are available for wall, floor, outdoor, or other applications. *Note: Characteristics shown are specific to indoor or outdoor use—never both. For families with both options, see the corresponding section for details.*

FINISHES

Finishes Library on page 52



B BLACK / FG FLEMISH GOLD



BP BLACK PURE / FG FLEMISH GOLD



BP BLACK PURE



GC GOLD COLOURED / B BLACK



GC GOLD COLOURED



W WHITE

INSTALLATION



WALL SURFACE

PERFORMANCE

CCT 2700K

CCT 3000K



DOWNLIGHT UPLIGHT

FORM & FUNCTION



ROUND



ROUND WITH SPIKES

WITHIN THIS CHAPTER

This section presents different product types within the family specifically designed for indoor wall applications, along with their main features.



ORBIT

FORM ROUND / ROUND WITH SPIKES

LED UP TO 5,8W - 770lm
RETROFIT GU10






OPTICS DOWN-UP

CCT 2700K / 3000K

ADJUSTABILITY FIX

IP20

ORBIT

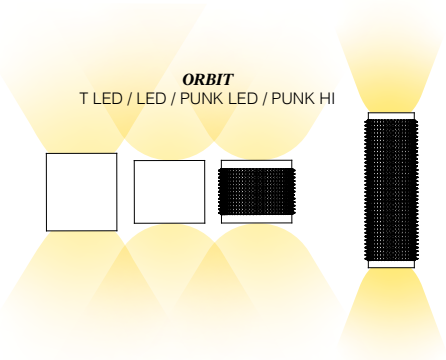

ORBIT				T LED	LED	PUNK LED	PUNK HI
3000K CRI>90	LED 3W / 484lm / 24V-DC	IP20	NON DIM	271 05 93 ◇			
	2 x LED 2.9W / 386lm / 350mA		MAINS		271 04 93 ED8 ◇	271 08 93 ED8 ◇	
2700K CRI>90	LED 3W / 484lm / 24V-DC		NON DIM	271 05 92 ◇			
	2 x LED 2.9W / 369lm / 350mA		MAINS		271 04 92 ED8 ◇	271 08 92 ED8 ◇	
🔊 2 x QPAR51 max.35W							472 361 00
				◇ B-FG ●● / W-W ○○ 220-240V / 50-60Hz	◇ B-FG ●● / W-W ○○ 220-240V / 50-60Hz	◇ BP-FG / GC-B ●● 220-240V / 0150-60Hz	◇ BP / GC ● GU10 / 100-240V / 50-60Hz
				◇	□	□	□ 0,5

REFERENCE COMPOSITION

↑ FIXTURES

1 I CHOOSE MY **FIXTURE** + **COLOUR** ◇

↓ ADDITIONS

- 2 I MUST ADD THIS **REQUIREMENT** (R)
- 3 I WANT TO ADD THIS **OPTION** (O)
- 4 I WANT TO ADD THIS **ACCESSORY** (A)

LED LAMP	REQUIREMENT / OPTION / ACCESSORY			
	ORBIT			
	T LED	LED	PUNK LED	PUNK HI
MORE INFO ON PAGE T7				○



ORBIT PUNK LED



ORBIT PUNK LED



ORBIT LED

VISO

FAMILY

Used either as a single installation or in a cluster, Visos powerful parabolic light patterns always make their mark. In a variety of finishes for indoor and outdoor use, it creates powerful light effects thanks to the combination of LED technology and a specialised lens, which further enhances its unique design.




VISO

FINISH B-MMAT BLACK - GOLD MATT

Find out more about
our VISO Family



deltalight.com/viso



VISO				
3000K CRI>90	2 x 5W / 462lm / 500mA	IP20	MAINS DIM	275 07 93 ED8 ◇
2700K CRI>90	2 x 5W / 433lm / 500mA			275 07 92 ED8 ◇
				◇ B-MMAT   / W-W   220-240V / 50-60Hz
				



WA-T FAMILY

WA-T's design creates an intriguing optical illusion, whereby the luminaire appears to be floating due to the effects of its indirect lighting. In the black version, this is particularly accentuated by the matt gold interior, which casts a soft, warm glow on the wall.




WA-T

FINISH B-MMAT BLACK - GOLD MATT

Find out more about
our WA-T Family



deltalight.com/wa-t



WA-T				WA-T	
3000K CRI>90	LED 7,5W / 700lm / 500mA	IP20	NON DIM	275 15 93 ◇	
 SOFT DIM	3000-2000K / CRI>90 LED 9W / 690lm / 250mA		MAINS DIM	275 15 1902 ED8 ◇	
				◇ B-MMAT  / W-W 	
				110-240V / 50-60Hz	
					



INDOOR LIGHTING

*MAINS VOLTAGE
TRACK SYSTEMS*


MAINS VOLTAGE

	MAINS VOLTAGE 220-240V 1 PHASE TRACK	MAINS VOLTAGE 220-240V 1 PHASE TRACK
INSTALLATION OPTIONS T 	 TRACK 1F ON PAGE 62	LIGHT OPTIONS ACCENT <i>LIGHT</i>  SPYCO PAGE 64 T
DESIGN OPTIONS	LINEAR  CORNER 90°	GENERAL <i>LIGHT</i>  TOUPE PAGE 72
CONTROL OPTIONS	 DIM NON DIM MAINS	

1F TRACK




INSTALLATION OPTIONS





TRACK	1F ON
1 PROFILE	
TRACK 2m	27600 0020 ◊ ◊ B ● / W ○
TRACK 3m	27600 0030 ◊ ◊ B ● / W ○
110-240V / 50-60Hz ◊ IP20 (W = RAL 9010)	
2 ENDCAP	
END CAP	27600 0410 B/W

DESIGN OPTIONS

3 DIMENSIONS	
The length of each profile needs to be defined in mm and will depend on the shape and construction of the design.	
4 CORNERS	
CORNER 180°	27600 0210 B/W
CORNER 90° IN	27600 0340 B/W
CORNER 90° OUT	27600 0350 B/W
5 CONNECTION	
END SUPPLY 11	27600 0110 B/W
END SUPPLY 12	27600 0120 B/W
MIDDLE SUPPLY	27600 0140 B/W

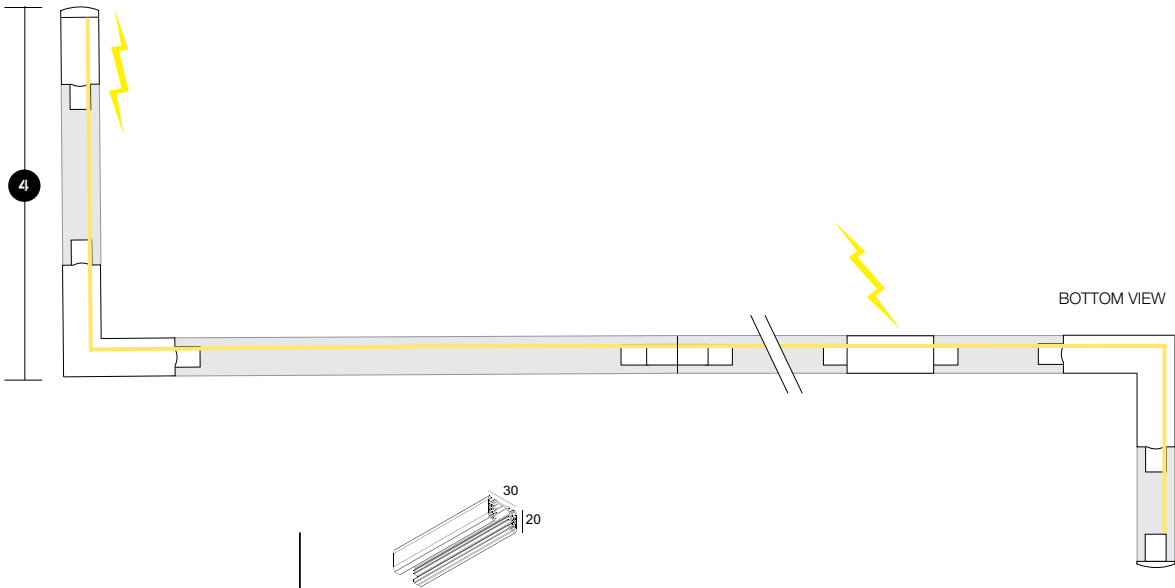

TRACK 1F ON

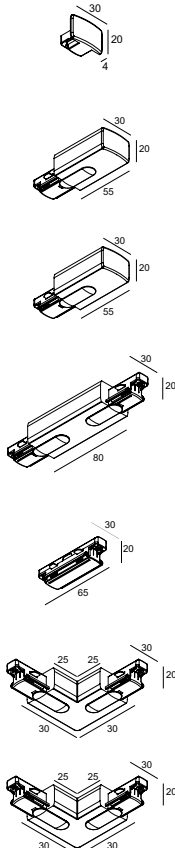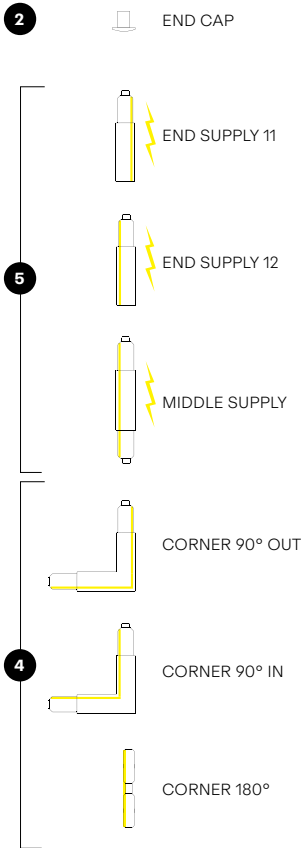

SPYCO FAMILY

LIGHT
OPTIONS

Spyco is a family of versatile spot luminaires that can be adapted to suit diverse lighting setups, with options for precise and customisable illumination. Advanced lenses ensure accurate light distribution, and optional dimming and honeycomb filter features guarantee optimum visual comfort. Spyco provides a tailored lighting solution that is both sophisticated and stylish, whatever the project.



SPYCO AC ADM
FINISH B BLACK


Find out more about
our SPYCO Family



deltalight.com/spyco

WITHIN THE FAMILY

Here is an overview of the family's key characteristics.
Check the installation icons to see if products are available for wall, floor, outdoor, or other applications.
Note: Characteristics shown are specific to indoor or outdoor use—never both.
For families with both options, see the corresponding section for details.

FINISHES	INSTALLATION	PERFORMANCE	FORM & FUNCTION
Finishes Library on page 52			
 B BLACK	 CEILING SURFACE	 CCT 2700K CCT 3000K	 ROUND
 W WHITE	 MAIN VOLTAGE MODULE		

WITHIN THIS CHAPTER

This section presents different product types within the family specifically designed for indoor mains voltage track applications, along with their main features.



SPYCO 62

FORM ROUND
LED UP TO 8W - 630lm
RETROFIT GU10
OPTICS 33°
CCT 2700K / 3000K
ADJUSTABILITY ADJUSTABLE
IP20



SPYCO

1 PHASE

LIGHT
OPTIONS



SPYCO HI ADM1F

							
SPYCO				AC ADM1F DIM8		HI ADM1F	
3000K CRI>90	8W / 630lm	33°	MAINS DIM	27601 9328 ◇			
2700K CRI>90	8W / 597lm			27601 9228 ◇			
🔊 QPAR51 max.20W						28318 0000 ◇	
				◇ B ● / W ○ (incl. SPY TUBE S) 230V / 50-60Hz		◇ B ● / W ○ 100-240V / 50-60Hz	
				◇ IP20		◇ IP20	

REFERENCE COMPOSITION

← FIXTURES

1 I CHOOSE MY **FIXTURE** + **COLOUR** ◊

↓ ADDITIONS

2 I MUST ADD THIS **REQUIREMENT** (R)

3 I WANT TO ADD THIS **OPTION** (O)

4 I WANT TO ADD THIS **ACCESSORY** (A)

		REQUIREMENT / OPTION / ACCESSORY	
		SPYCO	
		AC ADM1F DIM8	Hi ADM1F
TRACK 1F MORE INFO ON PAGE 604		R	R
FINISH MORE INFO ON PAGE T28			
SPY TUBE S	414 02 00 B / W / FG	A	

T



PROJECT: KANTOREN VAN TORNHOUT / ARCHITECT: ABSOIS ARCHITECTEN / PHOTOGRAPHY: JEROEN VERRECHT

T



SPYCO ADM

TOUPE FAMILY

LIGHT
OPTIONS

Toupe's conical shade, available in three sizes in black or white, adds a spatial touch to the pendant range. Choose a single pendant to hang over a table or create a dynamic decorative arrangement by mixing sizes or even colours at varying heights. Toupe is available as a dedicated LED pendant or with an E27 lamp holder and can be surface or track-mounted.

Find out more about
our TOUPE Family



deltalight.com/toupe

TOUPE C

FINISH W WHITE

+ REQUIREMENT TOUPE SHADE S
FINISH W WHITE

WITHIN THE FAMILY

Here is an overview of the family's key characteristics.
Check the installation icons to see if products are available for wall, floor, outdoor, or other applications.
*Note: Characteristics shown are specific to indoor or outdoor use—never both.
For families with both options, see the corresponding section for details.*

FINISHES

Finishes Library on page 52



B BLACK



W WHITE

INSTALLATION



CEILING
SUSPENDED



MAIN
VOLTAGE
MODULE

PERFORMANCE

CCT 2700K

CCT 3000K



GENERAL
LIGHTING

FORM & FUNCTION



ROUND

WITHIN THIS CHAPTER

This section presents different product types within the family specifically designed for indoor mains voltage track applications, along with their main features.



TOUPE

FORM ROUND

LED UP TO 8W - 630lm
RETROFIT E27

OPTICS OPAL

CCT 2700K / 3000K

ADJUSTABILITY FIX

IP20

TOUPE

1 PHASE

LIGHT
OPTIONS




TOUPE				C AC DIM8	C E27
3000K CRI>90	LED 8W / 630lm	IP20	MAINS DIM	100062 9308 ◇	
2700K CRI>90	LED 8W / 597lm			100062 9208 ◇	
💡 1 x A60 max.20W					100064 0000 ◇

◊ B ● / W ○

230V / 50-60Hz
INCL.1 x CABLE 3 x 0.75mm² 1.6m

E27 / 100-240V / 50-60Hz
INCL.1 x CABLE 3 x 0.75mm² 1.6m

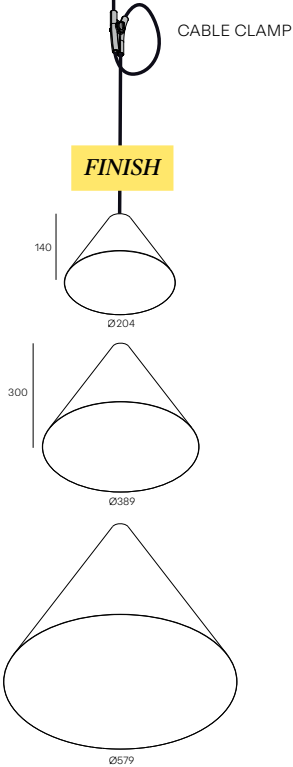

TOUPE CAC

+ REQUIREMENT TOUPE SHADE L

REFERENCE COMPOSITION

← FIXTURES

1 I CHOOSE MY FIXTURE + COLOUR ◊

↓ ADDITIONS

- 2 I MUST ADD THIS REQUIREMENT (R)
3 I WANT TO ADD THIS OPTION (O)
4 I WANT TO ADD THIS ACCESSORY (A)

					REQUIREMENT / OPTION / ACCESSORY	
					TOUPE	
					C AC DIM8	C E27
TRACK 1F ON MORE INFO ON PAGE 604					R	R
FINISH						
TOUPE SHADE S		28700 0010 B / W			R	
or TOUPE SHADE M		28700 0020 B / W			R	R
or TOUPE SHADE L		28700 0030 B / W			R	R
INSTALLATION						
CABLE CLAMP		15229 0010 B			O	O
LED LAMP MORE INFO ON PAGE T7						O



OUTDOOR LIGHTING

WALL

OUTDOOR WALL & FLOOR

FUNCTION	OUTDOOR WALL	OUTDOOR FLOOR
	FORM SQUARE / LINEAR	FORM SQUARE / LINEAR
ACCENT LIGHT	MONO PAGE 82 	TIMON PAGE 86 

MONO II FAMILY

With a timeless and sharply contoured design, a choice of down and down-up lighting options and the combination of a LED fixture with a lens, Mono shines a far-reaching and defined light that adds a stylized contemporary touch to any façade.

MONO II DOWN-UP / DOWN

FINISH N ANTHRACITE



MONO II LED





MONO II DOWN-UP LED

Find out more about
our MONO II Family



deltalight.com/monoII



MONO II			LED	DOWN-UP LED
3000K CRI>90	LED 5.8W / 787lm / 350mA	IP54	223 13 811 930 ◇	
	2 x LED 5.8W / 787lm / 350mA			223 53 812 930 ◇
2700K CRI>90	LED 5.8W / 753lm / 350mA		223 13 811 920 ◇	
	2 x LED 5.8W / 753lm / 350mA			223 53 812 920 ◇
			◇ A ● / B ● / FBRX ● / N ● / W ○	
			220-240V / 50-60Hz	100-240V / 50-60Hz
			⏚	⏚



TIMON
FAMILY

Available in three different heights, Timon is the stylish way to illuminate pathways or highlight terraces. Thanks to its uncomplicated, contemporary design, it blends easily into any outdoor setting.




TIMON 40 / 60

FINISH N ANTHRACITE

Find out more about
our TIMON Family



deltalight.com/timon

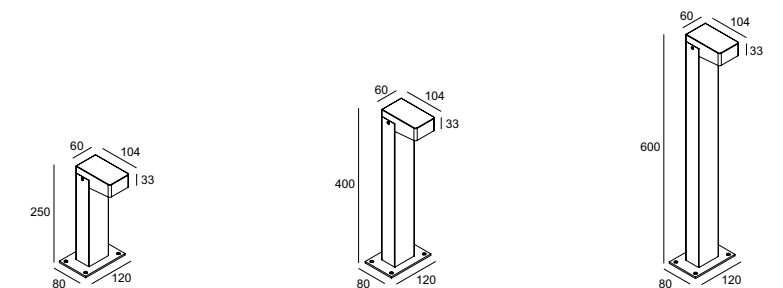

TIMON			25	40	60
3000K CRI>80	LED 8W / 720lm	IP55	27511 8300 ◇	27512 8300 ◇	27513 8300 ◇

◇ N ●
220-240V / 50-60Hz
INCL.1 x CABLE H05 RN-F 3 x 1mm² 2m
INCL.1x IP68 CONNECTOR 3P



REFERENCE COMPOSITION

↑ **FIXTURES**

1 | CHOOSE MY FIXTURE + COLOUR ◇

↓ ADDITIONS

2 I MUST ADD THIS **REQUIREMENT** (R)
3 I WANT TO ADD THIS **OPTION** (O)
4 I WANT TO ADD THIS **ACCESSORY** (A)

4 I WANT TO ADD THIS ACCESSORY (A)		REQUIREMENT / OPTION / ACCESSORY TIMON 25 40 60		
INSTALLATION MORE INFO ON PAGE T25-31		PIN 19	15222 0030	O O O



TIMON 60

CONTACT INFO

For additional product information, technical downloads, project inspiration, contact details and much more... please go to **deltalight.com**

Whether you access the site via your desktop computer or mobile device, an inspiring platform opens up with up-to-date content, exciting images, extensive product information, upgraded user experience... all in a fresh look & feel.

The product search engine will quickly guide you to the right product page, where you can download 3D files, Revit files, product data sheets, manual, photometric files and drawings.

The My Deltalight Toolbox helps you to quickly collect, save, download and share images and product information. Start creating your personal shortlists and share them with your partner, client, architect, electrical installer or other people involved in your project. You are free to use this feature without login, or you can register to save and edit multiple pinlists.

If you are looking for a contact person in your region or country please go to **deltalight.com/contact**

Asia Deltalight Asia asia@deltalight.com deltalight.com South East Asia T +65 9832 3753 North East Asia T +852 9442 6468 Oceania T +666 5580 0648	Czech Republic Deltalight Czech s.r.o. T +420 241 740 775 czech@deltalight.com deltalight.com	India Deltalight India india@deltalight.com deltalight.com	The Netherlands Deltalight Nederland B.V. T +31 (0)88 80 40 600 netherlands@deltalight.com deltalight.com	United Kingdom Deltalight UK LTD T +44 (0)20 7960 5030 uk@deltalight.com deltalight.com
	China T+86 139 1664 6457 salessupport.asia@deltalight.com deltalight.com	Italy Deltalight Italia S.r.l. T +39 02 2305 6210 F +39 02 2316 6064 italy@deltalight.com deltalight.com	Poland Deltalight Poland T +48 694 402 808 poland@deltalight.com deltalight.com	USA Deltalight USA, LLC. T +1 (954) 677 9800 F +1 (954) 677 1007 usa@deltalight.com deltalight.com New York T +1 (646) 973-3284 nyc@deltalight.us Los Angeles T +1 (213) 289-3048 la@deltalight.us Miami T +1 (954) 677-9800 miami@deltalight.us
Belgium / Luxembourg Delta Light NV T +32 (0)56 435 735 info@deltalight.com deltalight.com	Export South Deltalight Southern Europe T +39 366 428 8781 exportsouth@deltalight.com deltalight.com	Latin America Deltalight Latin America T +57 312 315 2070 latin@deltalight.com deltalight.com Colombia T +57 1 749 5307 F +57 321 202 5501 colombia@deltalight.com	Eastern Europe / Middle Asia Deltalight REEMA reema@deltalight.com deltalight.com	
Canada Deltalight Canada Inc. T +1 905 813 6130 canada@deltalight.com deltalight.com	France Deltalight SAS T +33 (0)9 70 73 52 42 france@deltalight.com deltalight.com	Mexico T +52 556 204 1203 mexico@deltalight.com Monterrey T +52 81 3081 4196 mexico@deltalight.com	Spain Deltalight Iberia S.L. T +34 659 157 430 hola@deltalight.com deltalight.com	
	Germany / Austria Deltalight GmbH T +49 (0)2451 4090-0 vertrieb@deltalight.de deltalight.com	Middle East Deltalight Middle East T +971 568 659 725 middleeast@deltalight.com deltalight.com	Switzerland Deltalight AG T +41 (0)61 485 99 10 switzerland@deltalight.com deltalight.com	Delta Light NV Muizelstraat 2 B-8560 Wevelgem (Moorsele) Belgium T +32 (0)56 435 735 info@deltalight.com deltalight.com

WORLDWIDE OFFICES

This brochure serves as a **technical addendum**, focusing on three key practical elements:

REQUIREMENT / OPTION / ACCESSORY

REQUIREMENTS

define the required installation method for each luminaire. They are mandatory choices to ensure the product is properly installed and fully functional.

OPTIONS

are additional installation methods tailored to the material or surface on which the luminaire will be mounted. They provide flexibility, such as the choice of a plaster kit for seamless integration into plaster ceilings.

ACCESSORIES


enhance or modify the lighting effect and behaviour of the luminaire. They allow greater customisation by adjusting the way light is emitted or changing the visual impact to suit specific requirements.

TECHNICAL *ADDENDUM*

DO'S & DON'TS


CONNECTION

CORRECT CONNECTION:
SERIAL CONNECTION




WRONG CONNECTION:
PARALLEL CONNECTION

Depending on the number of fixtures the LED modules will function at half (2 LED's), one third (3 LED's) the luminous intensity. Moreover, due to different forward voltages the current will not split in equal part.

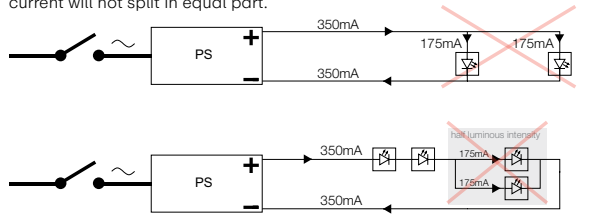

WRONG CONNECTION:
TESTING OF LED MODULES ON
SWITCHED ON POWER SUPPLY

Risk for an output voltage that exceeds the max for the LED.
A power supply that is switched on has max output on the secondary side (eg. 49V). The LED in eg. a Reo 3030 is 7W works at 350mA and 20,1V. 49V is far too high for the Reo 3030 >> LED will be damaged.

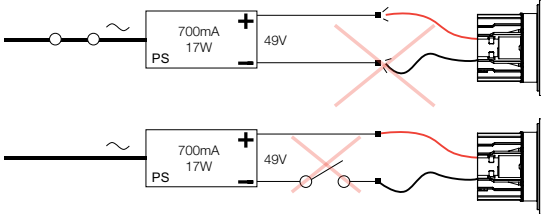

WRONG POWER SUPPLY:

Question:
How many Reo (7W) luminaires can be connected to power supply 300 90 914?
 $7W \times 4 = 28W$ >>> max **power** of 300 90 914 = 35W >>> **OK**
 $4 \times 20,1V = 80,4V$ >>> max **voltage** of 300 90 914 = 72V >>> **NOT OK**

Answer:
3 x Reo (7W) luminaires can be connected to power supply 300 90 914

Therefore: **always consult the matrix on FOLD-OUT!**

CURRENT CONTROLLED

DIMMABLE LED POWER SUPPLY - INSTALLATION SCHEME

DELTA LIGHT.COM/DIMLED5

DIM1 1-10V


DIM6 SWITCH DIM

DIM7 1-10V + SWITCH DIM


DIM8 FALLING EDGE DIMMING

DIM9 1-10V + SWITCH DIM + DALI


1-10V

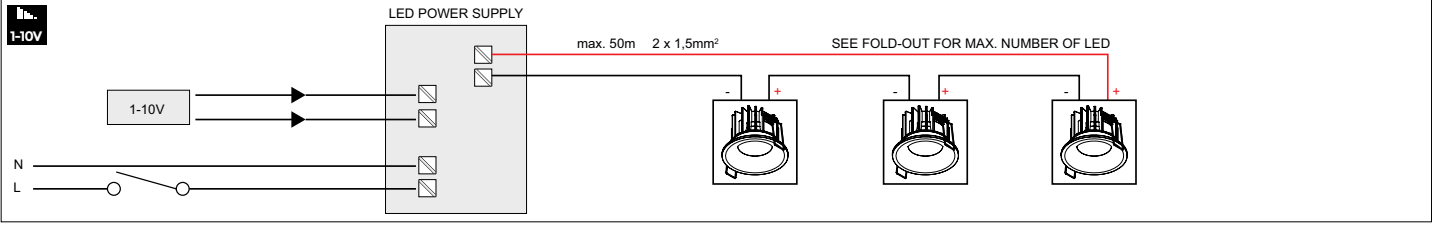


PUSH DIM

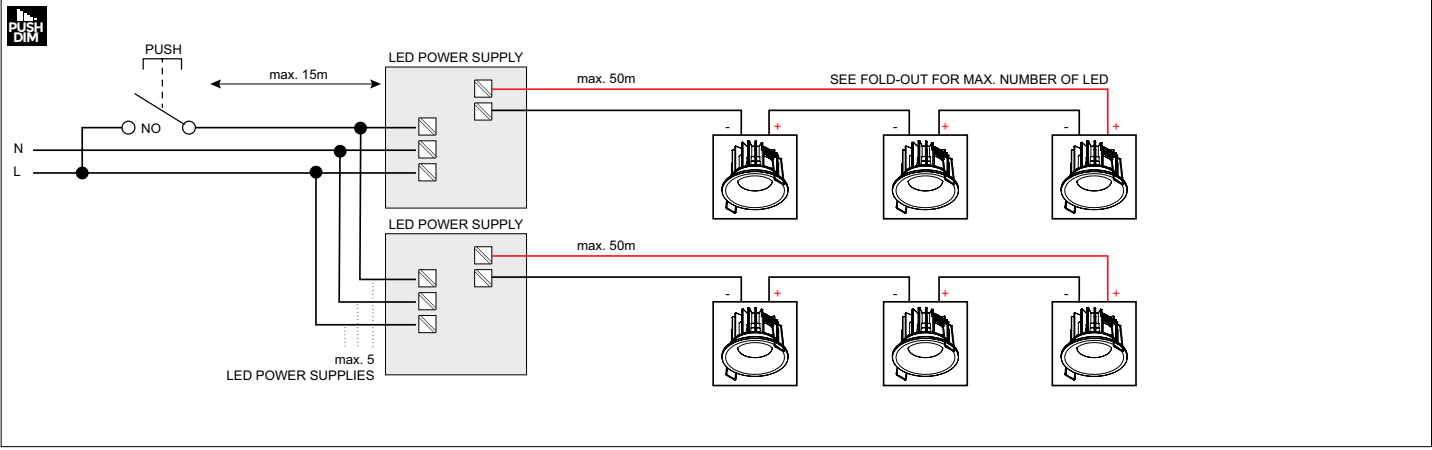

FE

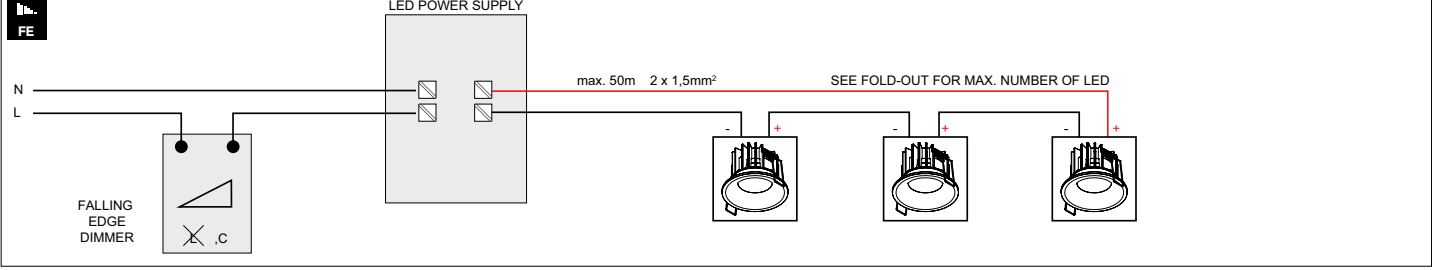

DALI

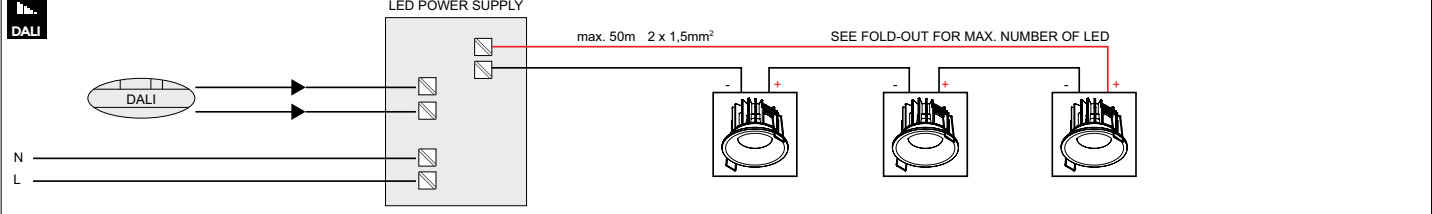

ALL DIAGRAMS ARE TYPICAL, PLEASE CHECK MAXIMUM POWER OF EACH INDIVIDUAL DIVICE FOR PRACTICAL USE.

89

TECHNICAL ADDENDUM

DELTA LIGHT

90

Manufacturer Delta Light NV

Product Design - Research - Development: Delta Light Team & Nice 2C
Coordination - Concept: Delta Light Team & Nice 2C
Graphic Design - Realisation: Delta Light Team & Nice 2C

Copyright © Delta Light NV
Made in Belgium

For the latest edition of the Lighting Bible, please visit
deltalight.com

All information in this catalogue is provided for information purposes only and Delta Light NV makes no representations about the accuracy or completeness of the information in this catalogue.
Delta Light NV may, in its sole discretion, revise the information and technical data contained hereinat any time without notice.
The catalogue does not contain any guarantee on the Delta Light NV products nor any warranty of merchantability or fitness for a particular purpose or use
All Delta Light products are supplied without lamps and any lamp data is given as a mere example.

The general terms & conditions of Delta Light NV shall be applicable on each sale of a Delta Light product.
Any trademarks, texts, images, graphics, designs and other information in this catalogue are the sole property and subject to the intellectual property rights of Delta Light NV and may not be copied, modified or used for any purpose without Delta Light's prior written consent.

DELTALIGHT